

MURS360

SURFACE MOUNT ULTRA FAST RECTIFIER


Reverse Voltage - 600 Volts Forward Current - 3.0 Amperes

Features

- ✧ Glass passivated junction chip
- ✧ For surface mounted applications
- ✧ Low profile package
- ✧ Built-in strain relief
- ✧ Ideal for automated placement
- ✧ Easy pick and place
- ✧ Superfast recovery time for high efficiency
- ✧ Glass passivated chip junction
- ✧ High temperature soldering:
260°C/10 seconds at terminals
- ✧ Plastic material used carries Underwriters
Laboratory Classification 94V-O

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Terminals: Solder plated
- ✧ Polarity: Indicated by cathode band
- ✧ Packaging: 16mm tape per EIA STD RS-481
- ✧ Weight: 0.22 gram

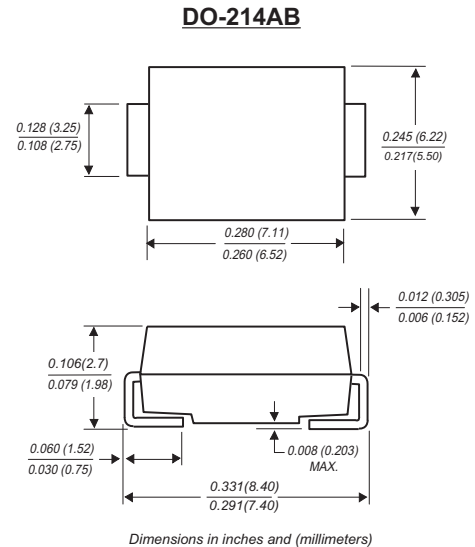

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%






Type Number	Symbol	MURS360	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	600	V
Maximum RMS Voltage	V_{RMS}	420	V
Maximum DC Blocking Voltage	V_{DC}	600	V
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	3.0	A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) @ $T_L = 100^\circ\text{C}$	I_{FSM}	100	A
Maximum Instantaneous Forward Voltage @ 3.0A	V_F	1.3	V
Maximum DC Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A = 100^\circ\text{C}$	I_R	10 250	μA μA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	50	nS
Typical Junction Capacitance (Note 2)	C_j	30	pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$ $R_{\theta JL}$	47 12	$^\circ\text{C/W}$
Operating Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to + 150	$^\circ\text{C}$

Notes: 1. Reverse Recovery Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$

2. Measured at 1 MHz and Applied $V_R = 4.0\text{ Volts}$

3. Units Mounted on P.C.B. with 0.6 x 0.6" (16 x 16mm) Copper Pad Areas

RATINGS AND CHARACTERISTIC CURVES MURS360

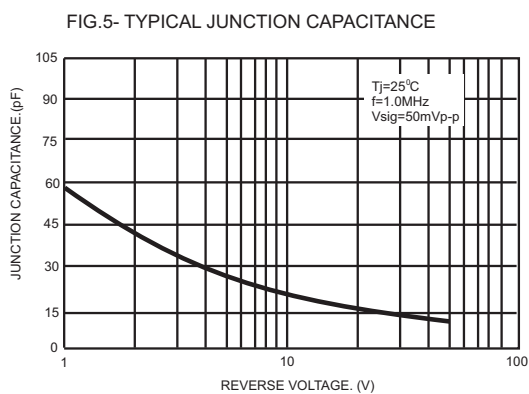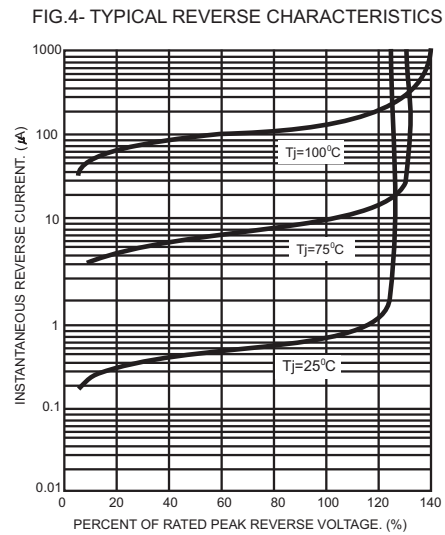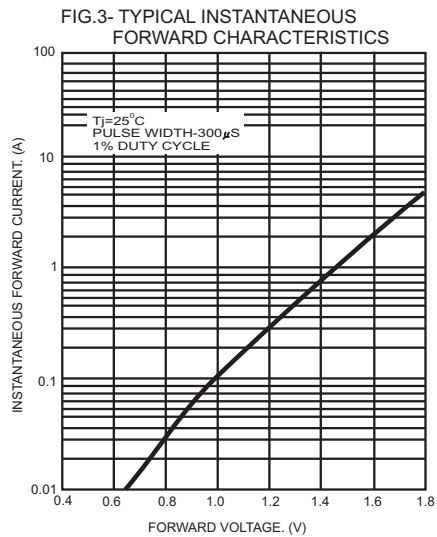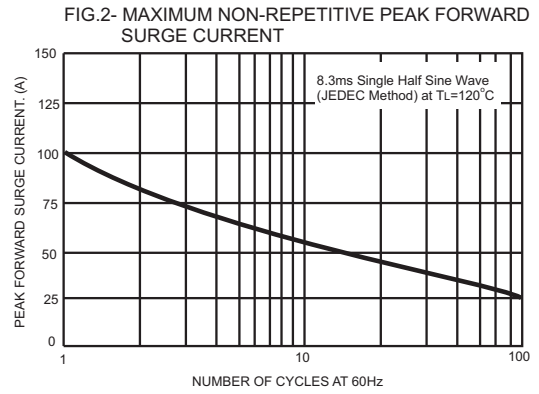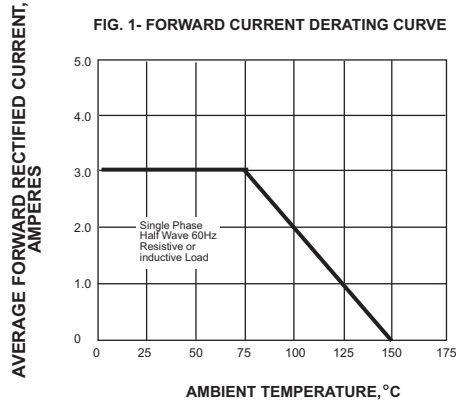

Note: Specification is subject to change without further notice. For more details and updates, please visit our website.